

TYPE _____ · DATE _____ · PROJECT _____


SR7

Sage Relay — High-Bay (Multi-Channel)


Dimensions & Mounting

All dimensions in inches

SIDE ELEVATION

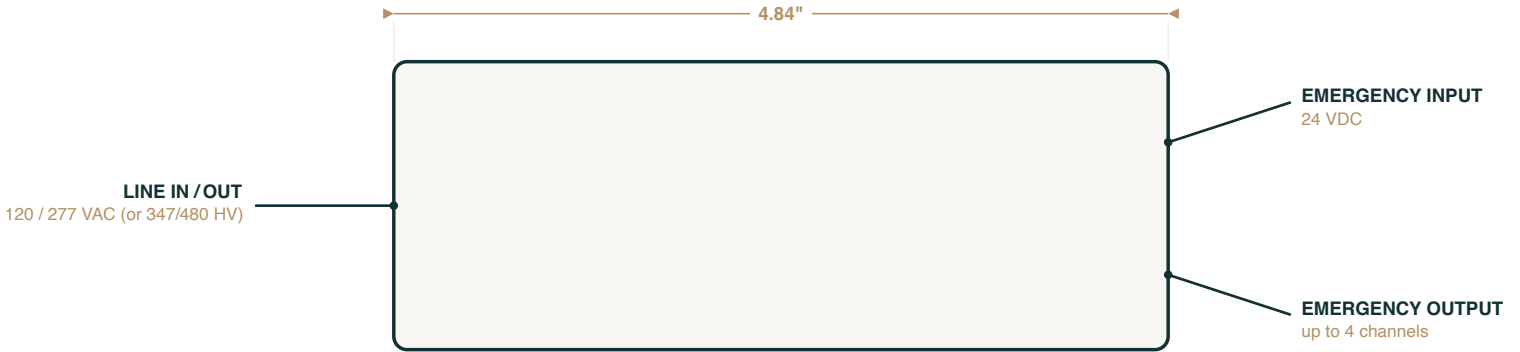

END ELEVATION

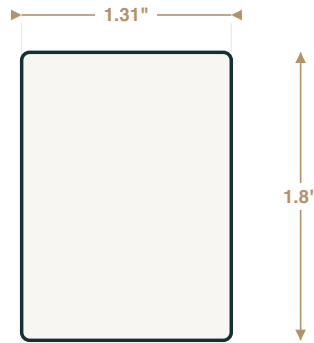

DIMENSIONS

Channels	up to 4 (one per driver)
Emergency output	max power 60 W
Input option	347 / 480 VAC (HV)

Housing:

Extruded aluminum, multi-channel

CONNECTIONS

- **LINE IN / OUT** 120 / 277 VAC (or 347/480 HV)
- **EMERGENCY INPUT** 24 VDC
- **EMERGENCY OUTPUT** up to 4 channels

MOUNTING

Mounting rails; factory or field installable in the fixture Fire & Electrical Enclosure. Operates luminaires with up to 4 drivers (channels).

CONFIGURATIONS

Configuration	Dimensions (L × H × D)	Volume
1–2 channels · 120/277 VAC	4.84" × 1.80" × 1.31"	9 cu in
1–2 channels · 347/480 VAC	8.30" × 2.28" × 1.50"	29 cu in
3–4 channels · 120/277 VAC	7.74" × 1.80" × 1.31"	17 cu in
3–4 channels · 347/480 VAC	11.00" × 2.28" × 1.50"	38 cu in

NOTES

- All dimensions are nominal, in inches. Verify critical dimensions against the physical sample before fabrication.
- Lead exits and wiring polarity are shown in the side elevation; observe polarity per the Sage Relay installation guide.

“Engineered for the spaces it protects.”