

TYPE \_\_\_\_\_ · DATE \_\_\_\_\_ · PROJECT \_\_\_\_\_


# ASP

Sage Aspen — Outdoor Emergency Egress Luminaire

## Dimensions & Mounting


All dimensions in inches, nominal

### FIXTURE — FRONT ELEVATION

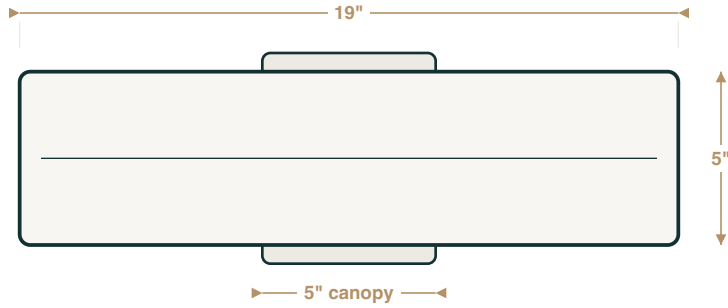

Wall, top (T), or ceiling mount over a standard deep J-box (4" x 4" x 2 1/8", by others); ceiling screw centers 2 3/4".

### REMOTE POWER SUPPLY (BB-20)

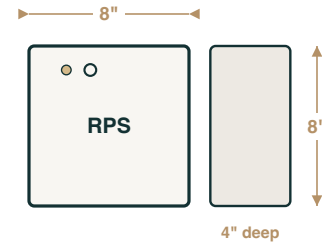

status LED + push-to-test on the face;  
recessed option (REC): 9.5" x 8"

### FIXTURE & MOUNTING DIMENSIONS

	Value
Fixture — light bar W x H	19" x 5"
Center canopy width	5"
Device box (by others)	4" x 4" x 2 1/8" deep J-box
Canopy fasteners	(4) #6-32 stainless to the device box
Ceiling-mount screw centers	2 3/4"
Remote power supply — surface	8" x 8" face x 4" deep
Remote power supply — recessed (REC)	9 1/2" x 8"

### CONSTRUCTION

Extremely low-profile formed-aluminum housing, IP66-sealed; custom colors including brushed aluminum. Wall, top, or ceiling mount over a standard deep J-box. The 20 W battery-backup model pairs with the remote power supply (status LED + push-to-test on its face; access cover).

### NOTES

- All dimensions are nominal, in inches; per the published mounting data.
- Maximum wiring length from the 20 W remote power supply to the fixture: #18 AWG 60 ft · #16 100 ft · #14 160 ft · #12 250 ft (#20 AWG 300 V control cable, 2-conductor 12 VDC).

*"Engineered for the spaces it protects."*