


· TYPE _____ · DATE _____ · PROJECT _____

COM
Sage Compass — Corrosion-Resistant LED Remote Head

Dimensions & Mounting
All dimensions in inches, nominal

DIMENSIONS — FRONT · SIDE (ENCLOSURE, SINGLE OR DOUBLE HEAD)

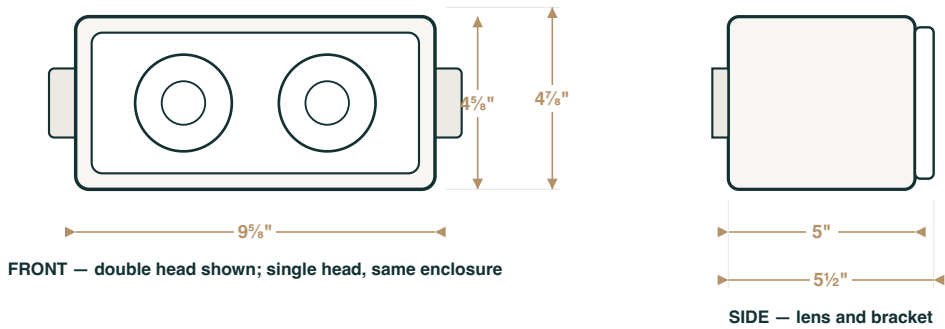

ENCLOSURE DIMENSIONS

	Value
Width	9 5/8" (245 mm)
Height	4 5/8" (118 mm) housing · 4 7/8" (124 mm) overall
Depth	5" (127 mm) housing · 5 1/2" (140 mm) overall
Heads	single or double in the same enclosure
Mount	wall or ceiling; back mount over the universal knockout pattern, gasketed

CONSTRUCTION

Reinforced polycarbonate housing, white or black, with a corrosion-resistant one-piece high-impact UV-stabilized polycarbonate lens, a molded gasket and stainless steel screws; knockouts for conduit feed; NEMA 4X.

NOTES

- All dimensions per the published drawing, in inches with millimeters as printed; single and double head units share one enclosure.
- The head aiming range and the knockout pattern geometry are not published; contact Sage for mounting details.