

TYPE _____ · DATE _____ · PROJECT _____


CYP

Sage Cypress — Full Body Linear High Bay · Sensor Ready, Lumen & Kelvin Selectable

Dimensions & Mounting

All dimensions in inches, nominal

PLAN VIEW · END PROFILE (DRAWN ROTATED) — SAME VERTICAL SCALE

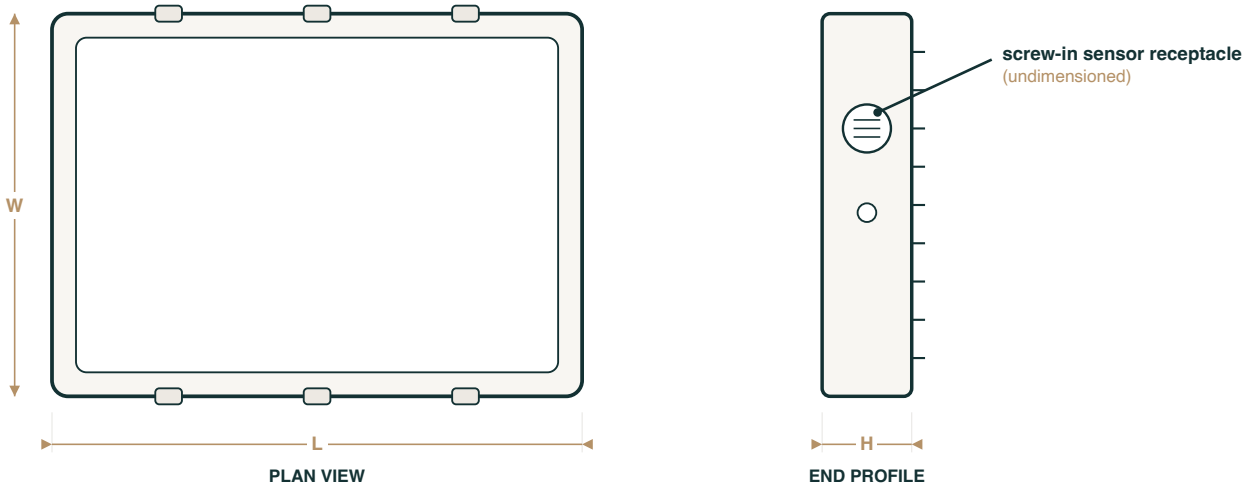

Identification only — drawn at the CYP-24L-SL-SK proportions; letter callouts per the published drawing, all values in the table below. Edge tabs, sensor receptacle, and knockout are undimensioned identification detail.

DIMENSIONS & WEIGHT

Model	L (in)	W (in)	H (in)	Weight (lbs)
CYP-18L-SL-SK	13.00	9.50	2.20	3.7
CYP-24L-SL-SK	14.20	10.25	2.40	4.5
CYP-36L-SL-SK	19.70	10.25	2.60	6.5
CYP-60L-SL-SK	30.70	11.00	2.60	9.25

CONSTRUCTION

Premium powder-coat, die-cast aluminum housing, white; polycarbonate prismatic lens; finned heat-sink profile with a screw-in sensor receptacle (occupancy sensor and remote control sold separately). Surface, pendant, or cable (3 m / 5 m) mounting via kits, ordered separately. cULus listed for damp locations.

NOTES

- All dimensions in inches, nominal, per the published dimensions table — the complete published dimensional record. Axis letters as published: L = fixture length · W = fixture width · H = fixture height (housing depth).
- Mounting-hole patterns, mounting-kit geometry (surface / pendant / cable), and conduit-entry data are not published for this fixture — contact Sage for mounting details. Surface- and pendant-mount kits are not compatible with the 347–480 V step-down (UNC) or EM-driver options.

“Engineered for the spaces it protects.”