


· TYPE _____ · DATE _____ · PROJECT _____

LAU
Sage Laurel — Linear High Bay · Sensor Ready, Lumen & Kelvin Selectable

Dimensions & Mounting
All dimensions in inches, nominal

PLAN VIEW · END PROFILE (DRAWN ROTATED) — SAME VERTICAL SCALE

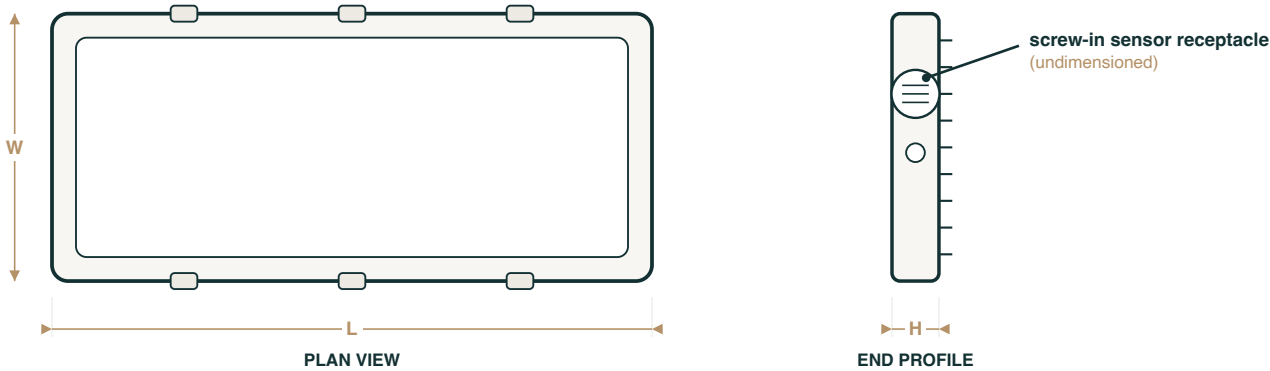

Identification only — drawn at the LAUSR-241815L-4K5K proportions; letter callouts per the published drawing, all values in the table below. Edge tabs, sensor receptacle, and knockout are undimensioned identification detail.

DIMENSIONS & WEIGHT

Model	L (in)	W (in)	H (in)	Weight (lbs)
LAUSR-181512L-4K5K	16.50	10.25	1.80	4.6
LAUSR-241815L-4K5K	23.00	10.25	1.80	7
LAUSR-363024L-4K5K	31.00	10.25	1.80	9.5
LAUSR-604836L-4K5K	44.00	10.25	1.80	12

CONSTRUCTION

Stamped, painted steel housing with polycarbonate lenses and a screw-in sensor receptacle; chain mount with V-hooks standard (1 m chain); optional pendant kit to ½" rigid conduit, surface mount kit and cable mount kits (3 m or 5 m); wire guards available.

NOTES

- All dimensions per the published dimension table, in inches: L = length, W = width, H = height.
- Mounting-kit geometry and the conduit entry are not published; the surface and pendant kits are not compatible with the UNC option.