


RAD

Sage Radiant — Floor Proximity LED Emergency Light


Dimensions & Mounting

All dimensions in inches, nominal


DIMENSIONS — FRONT · SIDE · LOUVERED FACE

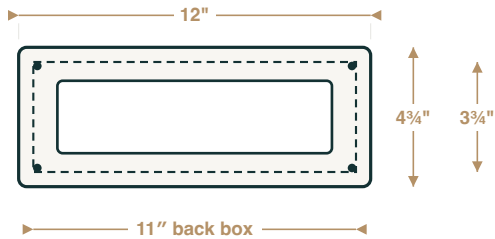

FRONT — OPEN FACE, brushed aluminum
diffuser window; back box dashed

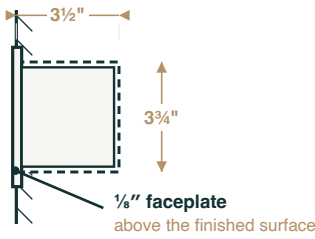

SIDE — masonry box by others
3 3/4" x 3 1/2" x 11" masonry box, 6 gang (RACO TP965 or equal)

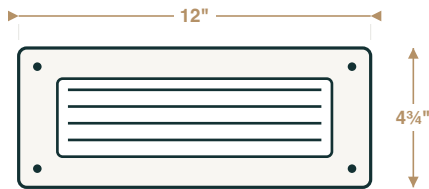

LOUVERED FACE (LV) — brushed stainless nickel
louwer assembles over the standard trim plate · 3/8" above the surface

MOUNTING

Mounting height up to 4 ft from the floor.
Box edge flush with, or just below, the mounting surface.
4 1/4" max opening in the finished surface.
Four #6-32 x 3/4" wet seal trim screws (1" with the louwer).

FACEPLATE, BACK BOX & MOUNTING DIMENSIONS

	Value
Faceplate W x H	12" x 4 3/4"
Back box	11" x 3 3/4" · 3 1/2" deep
Masonry box (by others)	3 3/4" x 3 1/2" x 11", 6 gang · RACO TP965 or equal
Faceplate above the surface	1/8" open face · 1 1/2" louvered face
Diffuser window	1/8" thick, UV stabilized polycarbonate or acrylic
Mounting height	up to 4 ft from the floor

CONSTRUCTION

Solid machined aluminum faceplate, brushed or satin enamel; steel housing with bracket mount locations and multiple knockouts; composite outdoor rated gasket; modular faceplate and lamp housing. Louvered face in brushed stainless nickel (LV).

NOTES

- All dimensions are nominal, in inches; per the published mounting data and dimensions drawings and the remote installation manual.