

TYPE _____ · DATE _____ · PROJECT _____





IGN

Sage Ignite — Universal-Mount Emergency Downlight

Dimensions & Mounting

All dimensions in inches, nominal

MOUNTING METHODS — SECTIONS

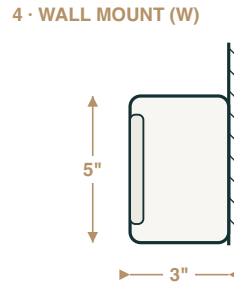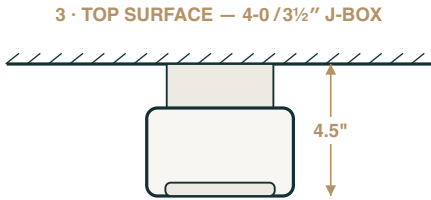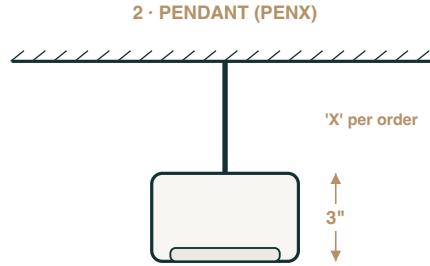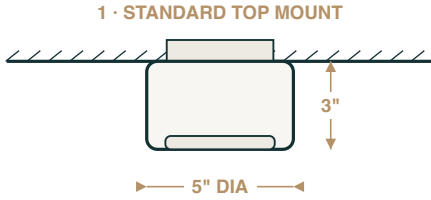

FIXTURE & MOUNTING DIMENSIONS

Mount	Dimensions
Fixture body	5" DIA × 3"
Standard top mount	3" below the ceiling, over a standard J-box
Top surface mount (4-0 / 3½" J-box)	4½" below the ceiling
Wall mount (W)	3" projection × 5"
Pendant (PENX)	stem length X per order · fixture 3"

CONSTRUCTION

Die-cast lamp housing, baked-enamel finish, stainless hardware; 4" trim. Universal mounting: standard top mount over a J-box, top surface mount to a 4-0/3½" J-box, wall mount, or pendant (PENX — length per order).

NOTES

- All dimensions are nominal, in inches; per the published mounting data.
- Same 4" LED engine as the Sage Phoenix (recessed) — specify Ignite where the ceiling cannot be opened.

"Engineered for the spaces it protects."