

· TYPE _____ · DATE _____ · PROJECT _____


NEX

Sage Nexus — LED Exit and Emergency Combo

Dimensions & Mounting

All dimensions in inches, nominal

DIMENSIONS — FRONT · SIDE (PUBLISHED CALLOUTS)

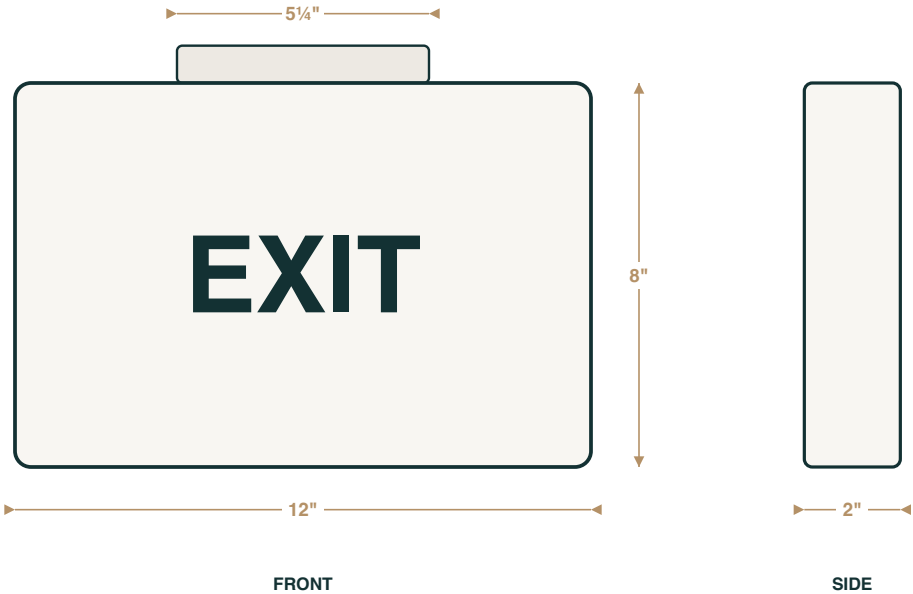

HOUSING, HEADS & CANOPY DIMENSIONS

	Value
Housing W x H	12" x 8"
Overall width with the lamp heads	20 5/8"
Overall height with the canopy	8 5/8"
Depth	2" housing · 4 5/8" across the heads
Mounting canopy	5 1/4" wide, EZ-snap; top or end mount
Wall mount	universal knockout back plate

CONSTRUCTION

Injection-molded 5VA flame-retardant thermoplastic housing, white or black, with two adjustable LED lamp heads on the sides; EZ-snap mounting canopy for top or end mount; universal knockout back plate for wall mount; snap-out chevrons.

NOTES

- All dimensions per the published drawing, in inches; the no-head version is the 12" x 8" x 2" housing alone.
- Head dimensions and the knockout pattern are not published.