

TYPE _____ · DATE _____ · PROJECT _____


PHO

Sage Phoenix — Architectural Emergency Downlight

Dimensions & Mounting

All dimensions in inches, nominal

MOUNTING PAN — PLAN VIEW

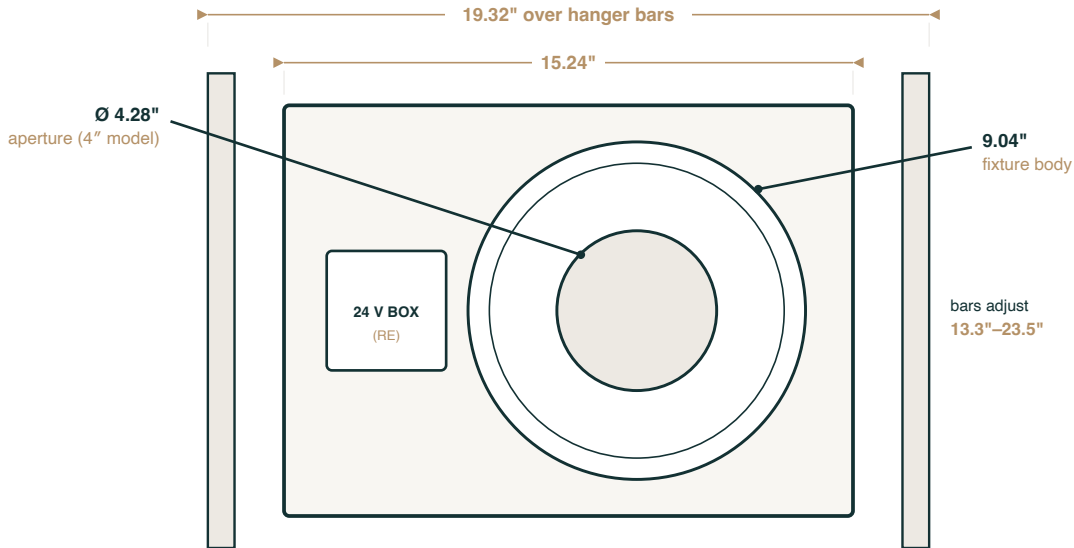

SECTION



RE section shown (2.5" — carries the 24 V connection box); AC section 1.5" (integral driver).

FIXTURE & MOUNTING DIMENSIONS

	Value
Mounting pan (frame · over hanger bars)	15.24" · 19.32"
Hanger-bar adjustment range	13.30" — 23.50"
Aperture (4" model)	Ø 4.28"
Fixture body on pan	9.04"
Depth — AC · RE	1.5" · 2.5"
Ceiling cut-out compatibility	4.25" — 6.5"

CONSTRUCTION

Die-cast lamp housing, baked-enamel finish, stainless hardware. New-construction mounting pan with adjustable hanger bars; remodel installation by spring clip; torsion-spring trim.

NOTES

- All dimensions are nominal, in inches; per the published mounting data (RE and AC configurations).
- RE places the 24 V connection box on the pan (2.5" section); AC integrates the line-voltage driver (1.5" section).

"Engineered for the spaces it protects."