

TYPE _____ · DATE _____ · PROJECT _____


SR6

Sage Relay — J-Box External Mount


Dimensions & Mounting

All dimensions in inches

SIDE ELEVATION

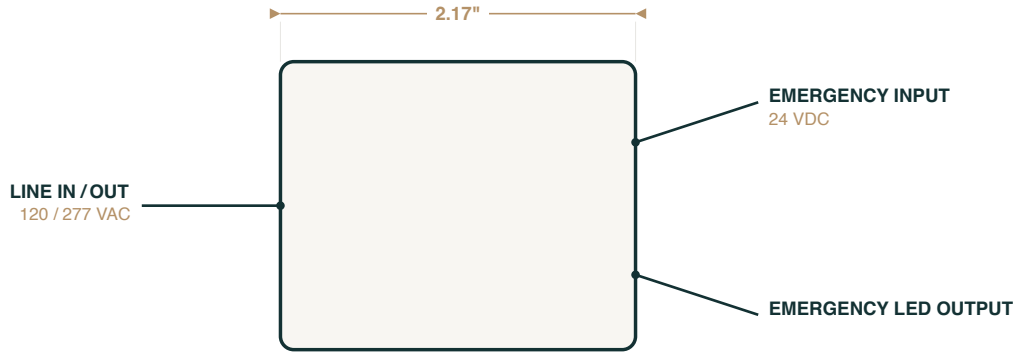

END ELEVATION

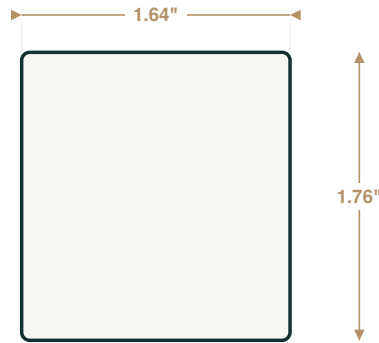

DIMENSIONS

Width	2.17"
Height	1.76"
Depth	1.64"
Conduit fitting	1/2-14 NPS
Volume	7.0 cu in

CONNECTIONS

- EMERGENCY INPUT 24 VDC
- EMERGENCY LED OUTPUT
- LINE IN / OUT 120 / 277 VAC

MOUNTING

External junction-box mount via a 1/2-14 NPS threaded fitting. Factory or field installable.

Housing:

Plenum-rated glass-fiber enclosure (7.0 cu in)

NOTES

- All dimensions are nominal, in inches. Verify critical dimensions against the physical sample before fabrication.
- Lead exits and wiring polarity are shown in the side elevation; observe polarity per the Sage Relay installation guide.

“Engineered for the spaces it protects.”